

Two For One Twister For Embroidery Thread

Salient Features:

- For all kind of S & Z Twist.
- Machine Construction Offers Long Lasting Maintenance Free Performance.
- Operating Panel with Motor Protecting devices & smooth Start.
- Rational deign of the Gearbox **permits** ideal take-up. The driving parts are automatically lubricated by the oil pump for optimum performance.
- Low Power Consumption
- Yarn Sensors avoids single ply with the help of Cutter.






MAHASHIV TEXTILE INDUSTRIES







Technical Specification : Two for One Twister (Embroidery Thread)

Machine Type	Double Sides Double Layer
Spindle RPM	4000-12000
Spindle Drive System	Tangential Belt
Twist Range	150-1200
Machine Width	800mm
Machine Height	2000mm
Start Mode	Slow Start Star-Delta

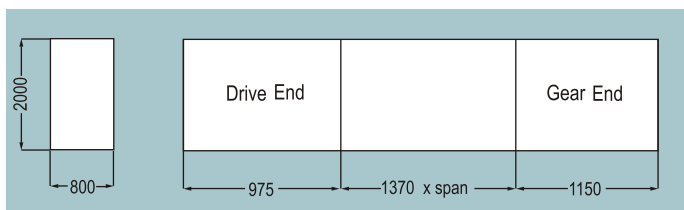
Primary Stage

Model No.	EM1-90		EM2-90		EM3-110	
No. Of Spindles	208/224/240					
Spindle Gauge in mm.	160					
Pot Dia in mm.	70					
Denier Range	50-150					
Installed Power in H.P.	5 HP					
Supply Package in mm				Take-up Package in mm		
EM1-90		EM2- 90		EM3-110		
						

Secondary Stage

Model No.	EM1-90	EM-90	EM3-110				
No. Of Spindles	156/168/180	130/140/150					
Spindle Gauge in mm.	215	260					
Pot Dia in mm.	90		110				
Denier Range	50-300						
Installed Power in H.P.	7.5 HP						
Supply Package in mm		Take-up Package in mm					
EM1-90	EM2- 90	EM3-110	EM1-90	EM2- 90	EM3-110		
							

Machine dimension



MAHASHIV TEXTILE INDUSTRIES

12, Ganibhai Compound, Fulpada Road, Surat - 395004,
Gujarat, INDIA. Tel. +91-261-2481107, Tele fax +91-261-2484807.
E-mail: mahashiv@hotmail.com, info@mahashiv.com Web: www.mahashiv.com

